



HANDSET OPERATION

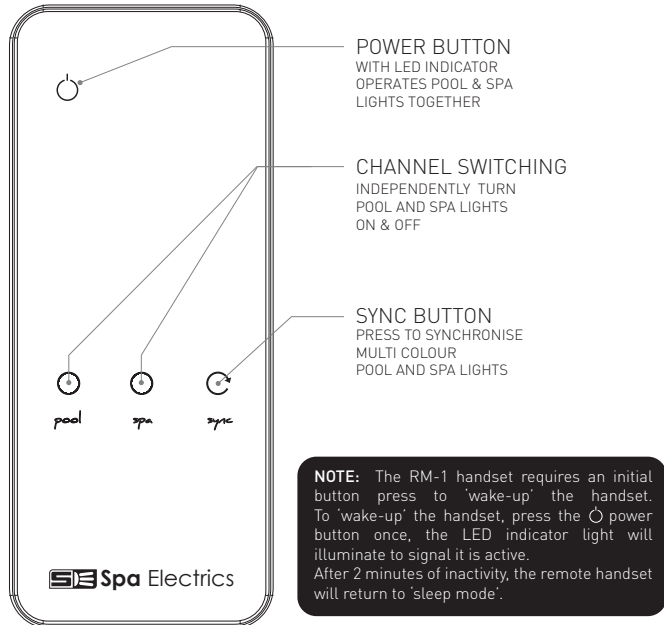

REMOTE CONTROL

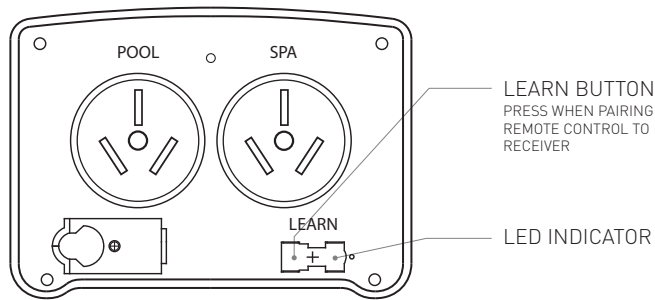

RECEIVER BASE

TECHNICAL SPECIFICATION

Battery: 2 x 'AAA'
Range: Up to 50m - line of sight
Freq: 800MHz

HANDSET PROFILE SETUP

Out of the box the RM-2H Handset will be set to the latest profile to operate with RM-2 Receivers purchased after NOV-2016, indicated by the Blue power led.

If you are replacing an RM-2 handset purchased prior to NOV-2016 your handset will need to be set to the legacy profile.

STEP 1

Install 2 x 'AAA' batteries(provided) into the battery compartment.

STEP 2

Within sixty(60) seconds, press and hold the 'SYNC' button until the Blue indicator light changes to Green. This should take approx, eight(8) sec.

Now your handset will be set to the legacy profile and can be paired to the RM-2 receiver.

If unsuccessful, simply remove the batteries from the handset and repeat steps 1 & 2.

HANDSET PAIRING

STEP 1

Press the 'LEARN' button on the base of the receiver. The receiver will now switch to learning mode, indicated by the red LED located next to the 'LEARN' button.

STEP 2

Within 7 seconds press any of the buttons on the Remote Handset. The remote handset is now assigned to the receiver.

MEMORY RESET

To reset the receiver memory, press and hold the 'LEARN' button continuously; The LED indicator will flash fast initially then flash slow indicating the memory has been erased. Once erased, release the 'LEARN' Button and complete steps 1 & 2 to program the handsets.

TROUBLE SHOOTING

CONDITION	CORRECTIVE ACTION
Flashing power indicator on handset	Low Battery - Replace 2 x AAA Batteries in handset
Intermittent communication between handset and the Receiver	- Reset receiver memory - Pair handset to receiver (see "handset pairing" for details)

FOR ASSISTANCE PLEASE
CONTACT SPA ELECTRICS

ph: +61 3 9793 2299
info@spaelectrics.com.au
www.spaelectrics.com.au

